



Server Technology

Solutions for the Data Center Equipment Cabinet

CDU Power Cords

Plug and Connector Power Cord Options for CDUs

If you manage a datacenter,
we have a solution for you.

How do I...

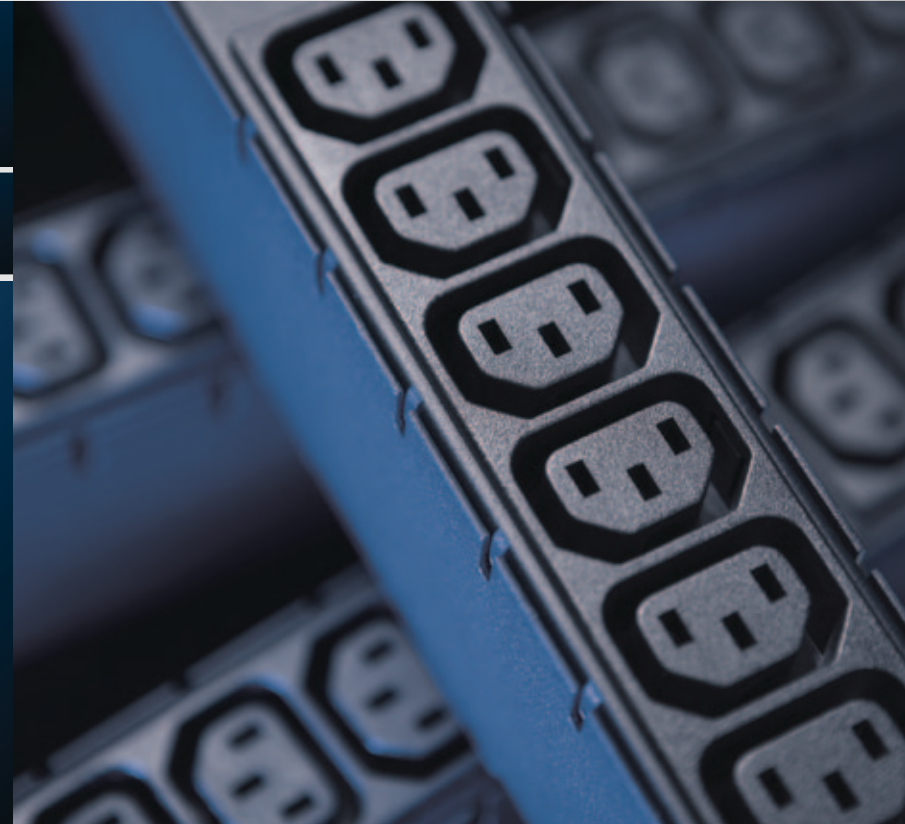
Verify the correct device power cord has been ordered?

Find specialty cords to meet the project's need?

Confirm plug and connector type?

Reduce clutter in the back of the rack with a device
power cord at the optimal length?

Review agency approvals on a variety of cords?























CDU Power Cords

Plug and Connector Power Cord Options for CDUs























STANDARD SOCKET

Plug	Connector	Part#	Length	Description
BS 1363 	C19 	PTCORD-4	10' (3m)	BS 1363 (United Kingdom) to IEC 60320 C19, 13A Fuse, 250V; EU Approvals
CEE 7/7 	C19 	PTCORD-2	10' (3m)	CEE 7/7 Schuko to IEC 60320 C19, 16A, 250V; EU Approvals
IEC 60309 	C19 	PTCORD-3	10' (3m)	IEC 60309 16A (Blue/250V, 2P+E, 6hr ground) to IEC 60320 C19; EU Approvals
NEMA 5-15P 	C19 	PTCORD-5	10' (3m)	NEMA 5-15P to IEC 60320 C19, 15A, 125V; UL, CSA Approvals
NEMA 5-20P 	C19 	PTCORD-6	10' (3m)	NEMA 5-20P to IEC 60320 C19, 20A, 125V; UL, CSA Approvals
NEMA L5-20P 	C19 	PTCORD-7	10' (3m)	NEMA L5-20P (Twist Lock) to IEC 60320 C19, 20A, 125V; UL, CSA Approvals
NEMA L6-20P 	C19 	PTCORD-1	10' (3m)	NEMA L6-20P (Twist Lock) to IEC 60320 C19, 20A, 250V; UL, CSA Approvals
C14 	C13 	CAB-1302C	1.5' (.46m)	IEC 60320 C14 to C13, 10A, 100-250V; UL, CSA, EU Approvals
C14 	C13 	CAB-1302A	3' (.91m)	IEC 60320 C14 to C13, 10A, 100-250V; UL, CSA, EU Approvals
C14 	C13 	CAB-1302	6' (1.8m)	IEC 60320 C14 to C13, 10A, 100-250V; UL, CSA, EU Approvals

CDU Power Cords

Plug and Connector Power Cord Options for CDUs



Plug	Connector	Part#	Length	Description
C14 	C13 	CAB-1302B	12' (3.7m)	IEC 60320 C14 to C13, 10A, 100-250V; UL, CSA, EU Approvals
C14 	C13 	PTCORDPK-1	6' (1.8m)	8-pack of CAB-1302 (IEC 60320 C14 to C13, 10A, 100-250V); UL, CSA, EU Approvals
C14 	C13 	PTCORDPK-2	6' (1.8m)	16-pack of CAB-1302 (IEC 60320 C14 to C13, 10A, 100-250V); UL, CSA, EU Approvals
C14 	C19 	CAB-1317A	1.5' (.46m)	IEC 60320 C14 to C19, 15A, 100-250V; UL, CSA Approvals
C14 	C19 	CAB-1317B	3' (.91m)	IEC 60320 C14 to C19, 15A, 100-250V; UL, CSA Approvals
C14 	C19 	CAB-1317C	6' (1.8m)	IEC 60320 C14 to C19, 15A, 100-250V; UL, CSA Approvals
C14 	C19 	CAB-1317D	10' (3m)	IEC 60320 C14 to C19, 15A, 100-250V; UL, CSA Approvals
C14 	C15 	CAB-C14-C15*	6' (1.8m)	IEC 60320 C14 to C15, 15A, 100-250V; UL, CSA Approvals
C14 	NEMA 5-15R 	CAB-1305	1' (.31m)	IEC 60320 C14 to NEMA 5-15R, 10A, 125V; UL, CSA Approvals
C20 	C13 	CAB-1350	12' (3.7m)	IEC 60320 C20 to C13, 15A, 100-250V; UL, CSA Approvals





















CDU Power Cords

Plug and Connector Power Cord Options for CDUs























STANDARD SOCKET

ANGLED SOCKET

	Plug	Connector	Part#	Length	Description
			CAB-1311B*	3' (.91m)	IEC 60320 C20 to C19, 20A, 100-250V; UL, CSA Approvals
			PMC1-0-1	8' (2.4m)	IEC 60320 C20 to C19, 20A, 100-250V; UL, CSA Approvals
			CAB-1311C	12' (3.7m)	IEC 60320 C20 to C19, 20A, 100-250V; UL, CSA Approvals
			CAB-1315A	3.28' (1m)	IEC 60320 C20 to C19, 16A, 250V; UL, VDE Approvals
			CAB-1315B	6.56' (2m)	IEC 60320 C20 to C19, 16A, 250V; VDE Approvals
			CAB-1301D	1.5' (.46m)	NEMA 5-15P to IEC 60320 C13, 10A, 100-250V; UL, CSA Approvals
			CAB-1301C	3' (.91m)	NEMA 5-15P to IEC 60320 C13, 10A, 100-250V; UL, CSA Approvals
			CAB-1301A	6' (1.8m)	NEMA 5-15P to IEC 60320 C13, 10A, 100-250V; UL, CSA Approvals
			CAB-1308A	1.5' (.46m)	C14 Right Bend to C13, 10A, 250V; UL, CSA, VDE Approvals
			CAB-1308B	3' (.91m)	C14 Right Bend to C13, 10A, 250V; UL, CSA, VDE Approvals

CDU Power Cords

Plug and Connector Power Cord Options for CDUs












Plug	Connector	Part#	Length	Description
C14 	C13 	CAB-1308C	6' (1.8m)	C14 Right Bend to C13, 10A, 250V; UL, CSA, VDE Approvals
C14 	C13 	CAB-1307A	1.5' (.46m)	C14 Left Bend to C13, 10A, 250V; UL, CSA, VDE Approvals
C14 	C13 	CAB-1307B	3' (.91m)	C14 Left Bend to C13, 10A, 250V; UL, CSA, VDE Approvals
C14 	C13 	CAB-1307C	6' (1.8m)	C14 Left Bend to C13, 10A, 250V; UL, CSA, VDE Approvals
C20 	C19 	CAB-1310A	1.5' (.46m)	C20 Right Bend to C19, 20A, 250V; UL, CSA Approvals
C20 	C19 	CAB-1310B	3' (.91m)	C20 Right Bend to C19, 20A, 250V; UL, CSA Approvals
C20 	C19 	CAB-1310C	6' (1.8m)	C20 Right Bend to C19, 20A, 250V; UL, CSA Approvals
C20 	C19 	CAB-1309A	1.5' (.46m)	C20 Left Bend to C19, 20A, 250V; UL, CSA Approvals
C20 	C19 	CAB-1309B	3' (.91m)	C20 Left Bend to C19, 20A, 250V; UL, CSA Approvals
C20 	C19 	CAB-1309C	6' (1.8m)	C20 Left Bend to C19, 20A, 250V; UL, CSA Approvals

CDU Power Cords











Plug and Connector Power Cord Options for CDUs



ANGLED SOCKET























Plug	Connector	Part#	Length	Description
		CAB-1320A	1.5' (.46m)	C20 Right Bend to C19, 16A, 250V; VDE Approvals
		CAB-1320B	3' (0.91m)	C20 Right Bend to C19, 16A, 250V; VDE Approvals
		CAB-1320C	6' (1.8m)	C20 Right Bend to C19, 16A, 250V; VDE Approvals
		CAB-1321A	1.5' (.46m)	C20 Left Bend to C19, 16A, 250V; VDE Approvals
		CAB-1321B	3' (.91m)	C20 Left Bend to C19, 16A, 250V; VDE Approvals
		CAB-1321C	6' (1.8m)	C20 Left Bend to C19, 16A, 250V; VDE Approvals

SPECIAL ORDER SOCKET

AS 3112			CAB-1342	8.2' (2.5m)	Australia/New Zealand AS3112 to IEC 60320 C19, 15A, 250V; SAA Approvals
BS 546			CAB-1380**	8.2' (2.5m)	Old British Standard (India/South Africa) BS 546 to IEC 60320 C13, 10A, 250V; SABS Approvals
BS 546			CAB-1345	8.2' (2.5m)	Old British Standard (India/South Africa) BS 546 to IEC 60320 C13, 16A, 250V; SABS Approvals
CEI 23-16			CAB-1361	8.2' (2.5m)	Italy CEI 23-16 to IEC 60320 C19, 16A, 250V
GB 2099			CAB-1362	8.2' (2.5m)	China GB2099 to IEC 60320 C19, 16A, 250V

CDU Power Cords

Plug and Connector Power Cord Options for CDUs

Plug	Connector	Part#	Length	Description
IRAM 2073 	C19 	CAB-1364	8.2' (2.5m)	Argentina IRAM 2073 to IEC 60320 C19, 10A, 250V; IRAM Approvals
JIS 8303 	C19 	CAB-1365	6.56' (2m)	Japan JIS 8303 to IEC 60320 C19, 15A, 125V; PSE Approvals
SEV 1011 	C19 	CAB-1366	8.2' (2.5m)	Switzerland SEV1011 to IEC 60320 C19, 16A, 250V
SI32 	C19 	CAB-1363	8.2' (2.5m)	Israel SI32 to IEC 60320 C19, 16A, 250V
NEMA 6-20P 	C19 	CAB-1354	8' (2.4m)	NEMA 6-20P to IEC 60320 C19, 20A, 250V
C14 	C13 	CAB-1358**	6.56' (2m)	IEC 60320 C14 to Right Bend C13, 10A, 100-250V; UL, CSA, EU Approvals
C14 	(2) C13 	CAB-1303	6' (1.8m)	"Y" Cord, IEC 60320 C14 to Dual C13, 10A, 100-250V, 6' (C14 to "Y" = 4', "Y" to each C13 = 2'); UL, CSA Approvals
C20 	C15 	CAB-1343	8' (2.4m)	IEC 60320 C20 to C15, 15A, 100-250V, 8' (NOTE: C15 fits both C14 & C16 inlets); UL, CSA Approvals
C20 	(2) C13 	CAB-1353	11' (3.4m)	"Y" Cord, IEC 60320 C20 to Dual-C13, 15A, 100-250V, 11' (C20 to "Y" = 1', "Y" to each C13 = 10'); UL, CSA Approvals
NEMA 5-15P 	C19 	CAB-1313	8' (2.4m)	NEMA 5-15P to IEC 60320 C19, 15A, 125V; UL, CSA Approvals
Blunt Cut 	C19 	CAB-1339	—	IEC 60320 C19 molded to 3-wire bare, 20'; UL, CSA Approval (Consult factory before ordering. Create a custom length cord using a mechanically attached plug body)

SPECIAL ORDER SOCKET

*Please consult STI for pricing and availability as these power cords may need to be special ordered

**Special Order only

NOTE: Special Order cords may require prepayment. Product samples may not be available. Special Order cables may be subject to different restocking restrictions. Specifications and appearance of products may vary and are subject to change without notice.



HEADQUARTERS - NORTH AMERICA

Server Technology, Inc.
1040 Sandhill Drive
Reno, NV 89521
United States
+00 (1) 775 284 2000 Tel
+00 (1) 775 284 2065 Fax
sales@servertech.com
www.servertech.com
www.servertechblog.com

EMEA

Server Technology Intl.
Sienna Court
The Broadway
Maidenhead
Berkshire
SL6 1NJ
United Kingdom
+44 (0) 1628 509053 Tel
+44 (0) 1628 509100 Fax
salesint@servertech.com

APAC

Server Technology, Inc.
37th Floor, Singapore Land Tower
50 Raffles Place
Singapore 048623
+65 (0) 6829 7008 Tel
+65 (0) 6234 4574 Fax
salesint@servertech.com